

MUSIC CABINET

Loudspeakers



➤ **JD40**

➤ **JD40/T**


TECHNICAL SPECIFICATIONS

Rated power, Watts	40
Tappings 100 volt line, Watts	40/20/10/5
Transformer Impedance, Ohms, 100V	250/500/1k/2k
Tappings 70.7 volt line, Watts	20/10/5/2.5
Driver impedance, Ohms	16
Effective frequency range, Hz (BS6840)	60-20,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz – 10 kHz	87
S.P.L. @ Full power, Octave Bandwidth, dB	103
Acoustic Power (dB-PWL@1 Watt) 1k/2kHz, dB	83/79
Dispersion at 1k/2k Hz, Degrees	160/100
Directivity Axial Q factor, 1k/2kHz	4.1/7.7
Dimensions, front & depth, mm	205 x 313 x 190
Net weight, Kgs	3.1
Colour/Finish	Black or White
Material	ABS moulded housing
Mounting	Plated Steel & Aluminium Bracket


JD40 JD40/T

MUSIC CABINET LOUDSPEAKERS


front view
unit: mm

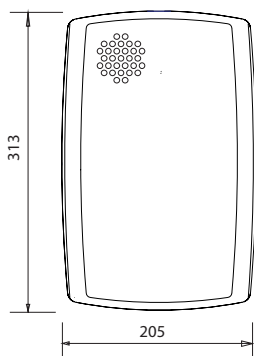


top view
unit: mm

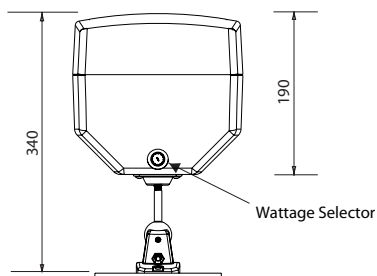

circuit diagram
JD40/T



speech octave band sensitivity

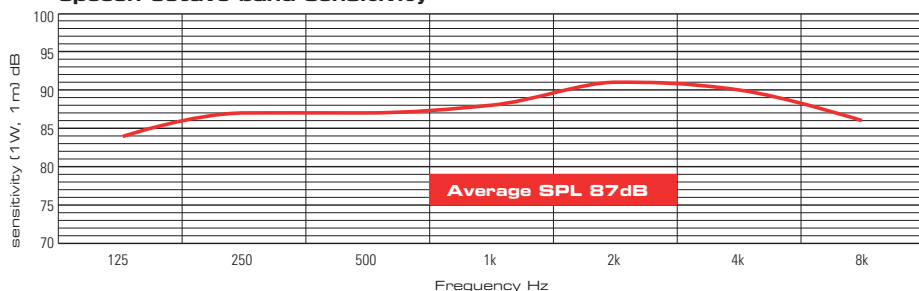

Effective Frequency Range **JD40 JD40/T** 60Hz -20,000Hz



Penton UK Ltd

31 Oakhurst Business Park | Wilberforce Way | Southwater | West Sussex | RH13 9RT

T: +44 (0)903 215315 | E: SALES@PENTONUK.CO.UK

www.penton.audio