104 Fox Lane, London N13 4AX • +44 (0)20 8886 4060 • +44 (0)20 8886 4442 • info@amsacoustics.com www.amsacoustics.com



Loudspeaker Test

Report

- Manufacturer:PENTONType:COLUMNModel:MCS20TENCFor:INTERNALReport No.:R2004/LS/MCS20TENC
- Prepared By: A. N. Stacey, B.Sc., MIOA(E), MInstSCE

January 2014

© AMS Acoustics, London

1.00 Object

1.01 The object of this Report is to present measurements of the acoustic performance of the MCS20TENC device.

2.00 Scope

- 2.01 The following characteristics were measured
 - On-axis (reference axis) frequency response
 - Polar response .
 - Small signal impedance •
 - •
 - Applied voltage On-axis 3rd octave band sound pressure level

from which the following are calculated:

- Directivity Index [dB], tabulated and graphical (i)
- (ii) Effective octave and wide band (100Hz to 10kHz) impedance
- (iii) Sensitivity [dB @ 1m,1W]:

Pink noise Speech shape (*IEC Male) (*BS EN 60268-16:2011)

- (iv) Octave band Sensitivity [dB @ 1m,1W/oct]
- (v) Acoustic Power [dB-PWL @ 1W], tabulated and graphical
- (vi) Octave band Power Apportionment [%]
- (vii) Expected maximum Sound pressure level [dB @ 1m] (If extrapolated from a low noise voltage level then power compression is not being considered)
- (viii) Frequency response chart
- (ix) Impedance bode plot
- (x) Polar response charts



3.00 Method

- 3.01 The device was mounted in Free Space as shown in figure 1 -Mounting Method E.
- 3.02 The measurements were made in an anechoic chamber.
- 3.03 Measurements were made as detailed in the AMS Loudspeaker Test Method document.
- 3.04 All measurements were made in general accordance with BS EN 60268: Part 5: 2003.
- 3.05 The test signal for all sound pressure level measurements was band limited Pink noise (100Hz to 10kHz) with a 6dB Crest factor.

4.00 Results

- 4.01 The band limited On-axis 3rd octave (100Hz-10kHz) frequency response, Impedance bode plot and Polar plots of the device are shown graphically.
- 4.02 Tabulated values of Directivity index, Sensitivity, Acoustic Power, Apportioned Power, Impedance and Expected Maximum SPL are shown in the Summary data sheet.
- 4.03 The Directivity Index has been calculated from 412 data points around the directivity balloon.

5.00 Notes

5.01 <u>Sensitivity</u>

The octave band sensitivity is produced for calculations. It should be noted that the octave band sensitivity is given as dB @ 1m with 1W in <u>each</u> octave band and wide band. For more detailed information, refer to AMS Acoustics Data Sheet 'Loudspeaker Sensitivity – Interpretation of Results'. Note that the octave band and wide band sensitivity levels are with reference to the 'Rated' impedance value.

5.02 Polar Plots

For convenience, each polar plot has been normalized to 0dB. For this reason, caution is advised when comparison of levels between octave bands are made. The reference axis frequency response should be used for comparison purposes.



6.00 Engineers Notes & Observations

The reference point is located at the geometric centre of the loudspeaker enclosure.

The reference axis was made normal to the loudspeaker grill and includes the reference point.

The impedance does not fall below 80% of the rated impedance within the frequency range 89Hz to 11.2kHz.



Loudspeaker Information


Type : Colour : Serial No. : Batch No. : Other Markings : Backbox : Grille : Weight (grams) : Depth (mm) : Width (mm) : Height (mm) :	MCS20TENC COLUMN WHITE - - - As supplied As supplied 2300 88 96 37
Special realures .	EN54-24 Compliant. (0359-CPR-00288)
Internal Details	
Driver Types/Sizes : Driver Serial No.(s) : Driver Markings : Damping Material : Available Tappings :	

NM = Not Measured, NA = Not Applicable




Manufacturer :				
	-			
	MCS20TENC			
Mounting :	Turntable			
Measurement Distance [m] :	2.29			
Test Voltage [V] :	48.30			
Rated Noise Voltage [V] :	100.00			
Rated Noise Power [W] :	20.00			
Rated Impedance [Ohms] :	500.0			
Minimum Impedance [Ohms] :	422 (84% of Rated)			
Effective Impedance (Pink noise) [Ohms] :	571.7 (PF=0.857)			
Effective Impedance (IEC Male) [Ohms] :	541.8 (PF=0.937)			
Reference Axis Located at :	0 degrees			

	Frequency [Hz]								
Parameter	125	250	500	1k	2k	4k	8k	dB	dBA
Directivity Index [dB on-axis]	1.1	1.9	3.7	6.5	9.9	10.2	12.7		
Sensitivity [dB @ 1m,1W]	68	80	81	84	86	84	84	92	92
Sensitivity, IEC Male [dB @ 1m,1W]	73	84	82	79	75	67	61	87	84
Acoustic Power [dB-PWL @ 1W]	78	89	88	89	88	85	83		
Apportioned Power [%]	12	10	12	15	14	12	8		
Effective Impedance [Ohms]	490	622	519	470	515	617	872		
Oct' Sensitivity [dB @ 1m,1W/Oct]	78	89	90	94	96	94	94		
Expected Maximum SPL [dB @ 1m]	81	93	94	97	100	97	97	105	105

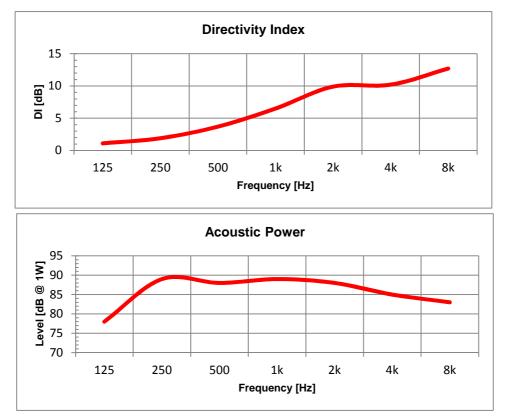




MCS20TENC

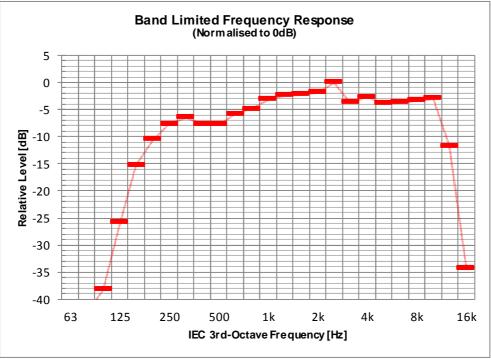


Test signal: Pink noise-6dBCF (100Hz-10kHz)

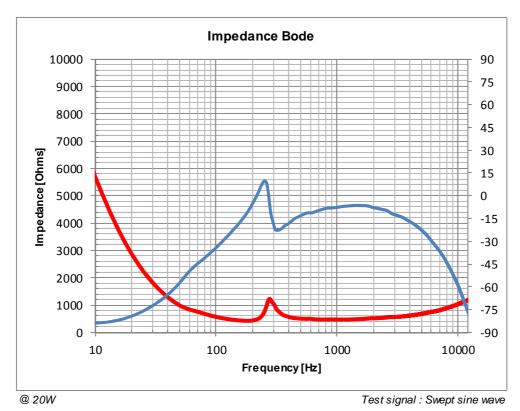




MCS20TENC

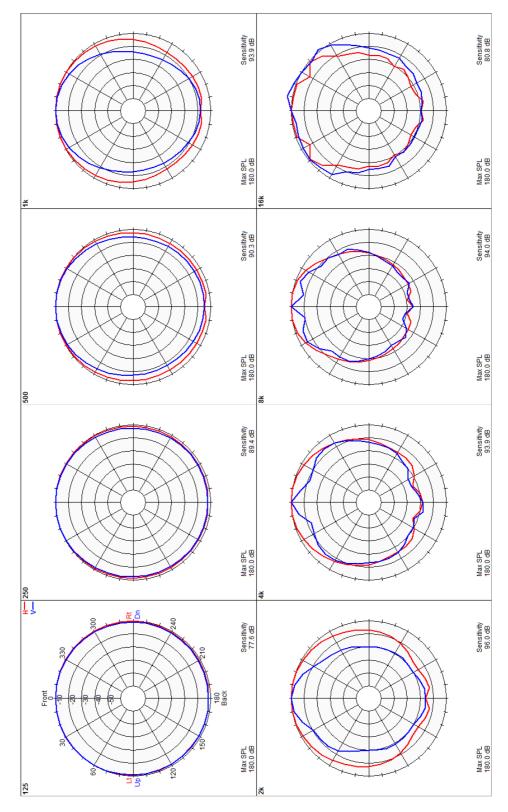



MCS20TENC

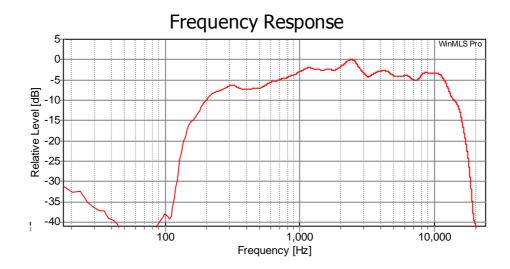

The frequency response is derived using a Swept sine method. Note:




1 -1 Signed: <


Countersigned:




Loudspeaker Mounting Methods




Mounting Method A Loudspeaker Mounted in a Reflective Baffle



Mounting Method B Loudspeaker Mounted in an Absorbent Baffle



Mounting Method C Loudspeaker Mounted on a Reflective Baffle



<u>Mounting Method B</u> Loudspeaker Mounted on an Absorbent Baffle



Mounting Method E

Loudspeaker not Attached to any Surface and Radiation Unaffected by nearby Reflecting Surfaces

